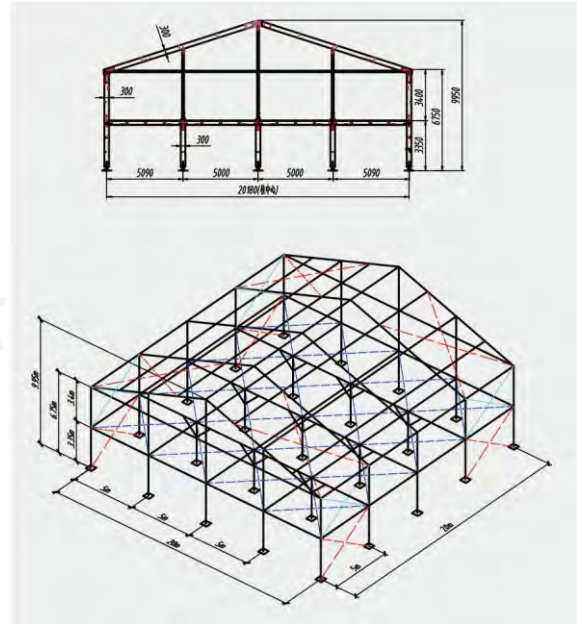


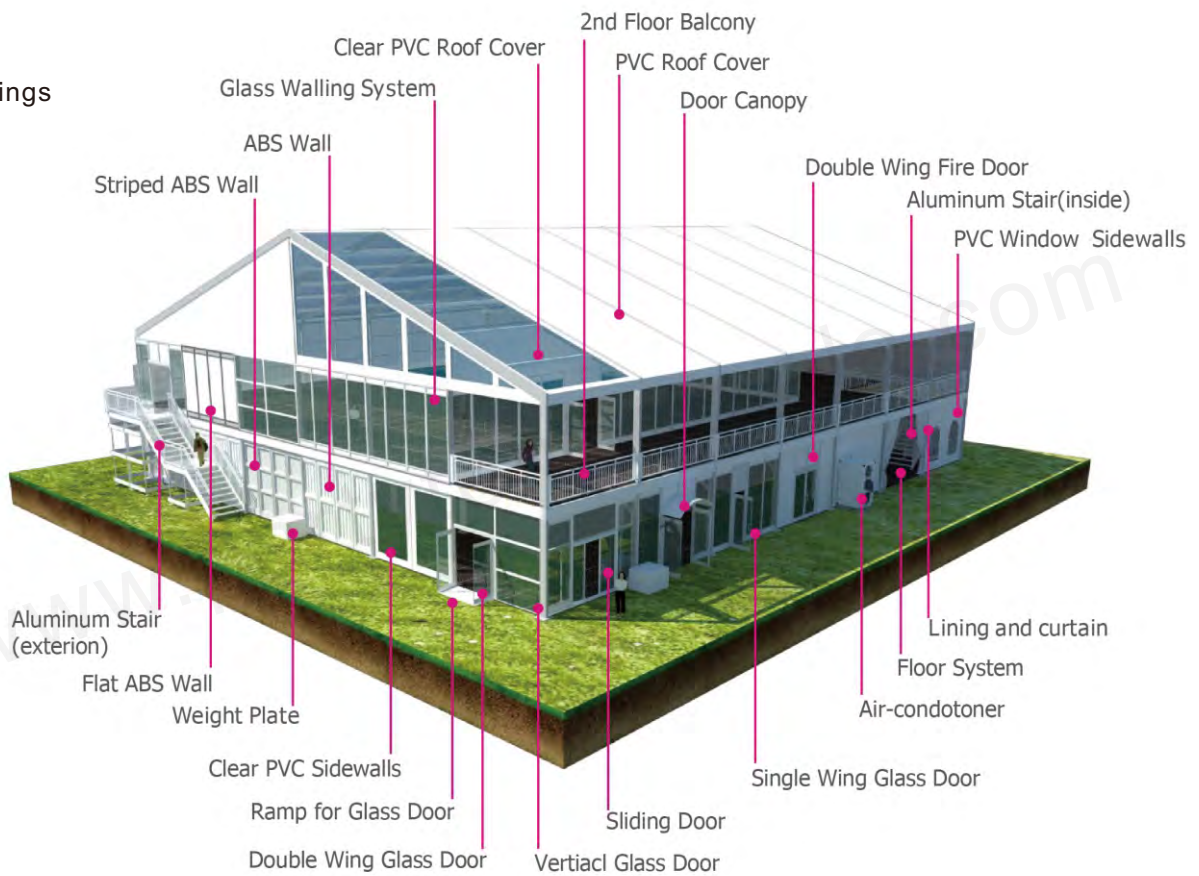
Technical Specification of Two Story Tents (DDS)







Span	Bay	Eave Height	Ridge Height	Main Profile(4 channel)
10m	5m	6.75m	8.5m	300x120x5 mm
15m	5m	6.75m	9.34m	300x120x5 mm
20m	5m	6.75m	10.17m	300x120x5 mm
25m	5m	6.75m	11m	300x120x5 mm
30m	5m	6.75m	11.75m	300x120x5 mm
40m	5m	6.75m	13.5m	300x120x5 mm

The minimum length of these two story tents is 10m, and the maximum is unlimited. We also supply custom tents that tailor made according to your site.



Optional Fittings



 <p>Roof Beam Upright Support Gable Pole</p>	 <p>Gable Pole</p>	 <p>Eave Purlin Ridge Purlin</p>
 <p>Eave Purlin</p>	 <p>Intermediate Purlin</p>	 <p>Eave Tension Rail</p>

Features

- Frame Material: hard pressed extruded aluminum 6061/T6(15HW)
- Cover Material: high quality double PVC-coated polyester textile, which is 100% waterproof, flame retardant, UV resistant, self-cleaning
- Connector: strong hot-dip galvanized steel
- Allowed Condition: -30 degree Celsius ~ +70 degree Celsius
- Wind load: max. 100km/h (can be reinforced)
- Snow load: 75kg/sqm
- Easy to be assembled and dismantled.
- No pole inside, 100% available interior space.